



Installing PSP 3000 D-Pad

Tools used in this guide

- [Phillips #00 Screwdriver](#)
- [Spudger](#)



Step 1 - Battery

- Start on the back of the device. This is where the battery and the battery cover are located.



Step 2

- The battery door is located on the left side when looking at the PSP from the back. Lift open the battery door to reveal the battery. Remove the battery cover.
- Using your finger, pry up the top edge of the battery. Continue to pull the top edge until the bottom of the battery is free.
- Remove the battery.



Step 3 - Casing

- Using a spudger or fingernail, peel back the warranty sticker that is behind the battery.




Step 4

- Unscrew all four screws from the back of the PSP.
 - Two from behind the battery.
 - Two on the right side of the PSP.



Step 5

- Unscrew two screws from the top of the PSP.

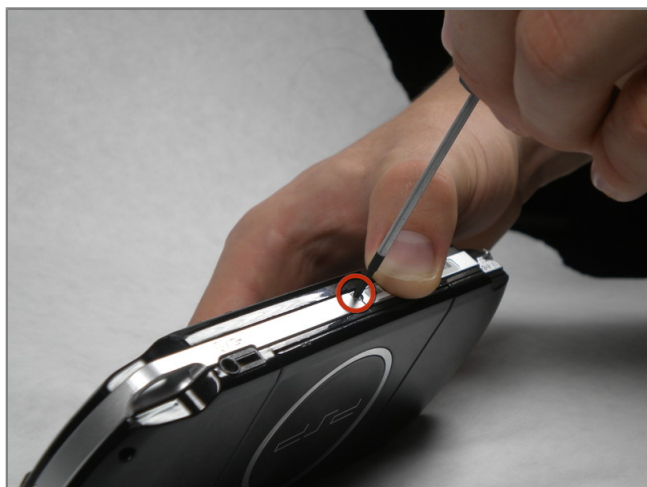

Step 6


- Remove a single screw from the bottom surface of the PSP.



Step 7

- Starting from the 'R' trigger, slide the spudger in between the outer casing and the PSP, and gently pry off the casing.
- Remove the front casing completely.



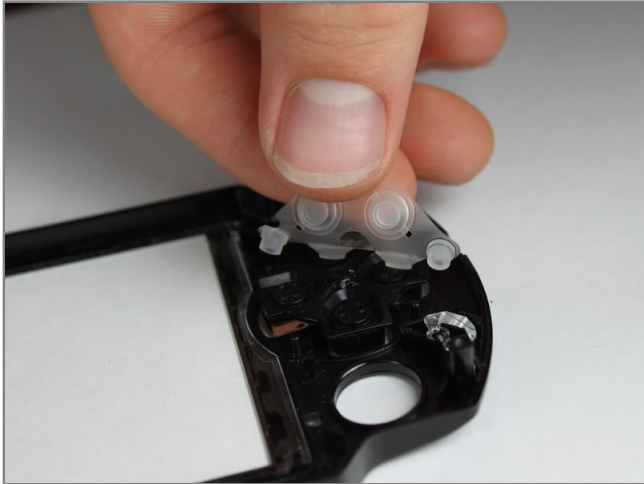

Step 8 - D-Pad

- Peel up the rubber pad that is securing the D-pad buttons to the backside of the front casing.
- Remove the D-pad and the rubber piece.

